


CIRCLE K SOUTHWEST PROTOTYPE 1480 - 08/12/2013
Drawing Name: \\fs-104-cv\projects\2013\20130791\20130791-P2.1-CS.dwg, last modified: 08-12-2013 - 1:13pm, created by: gadd
A B C D
Circle K Stores, Inc. Albuquerque, NM 87121

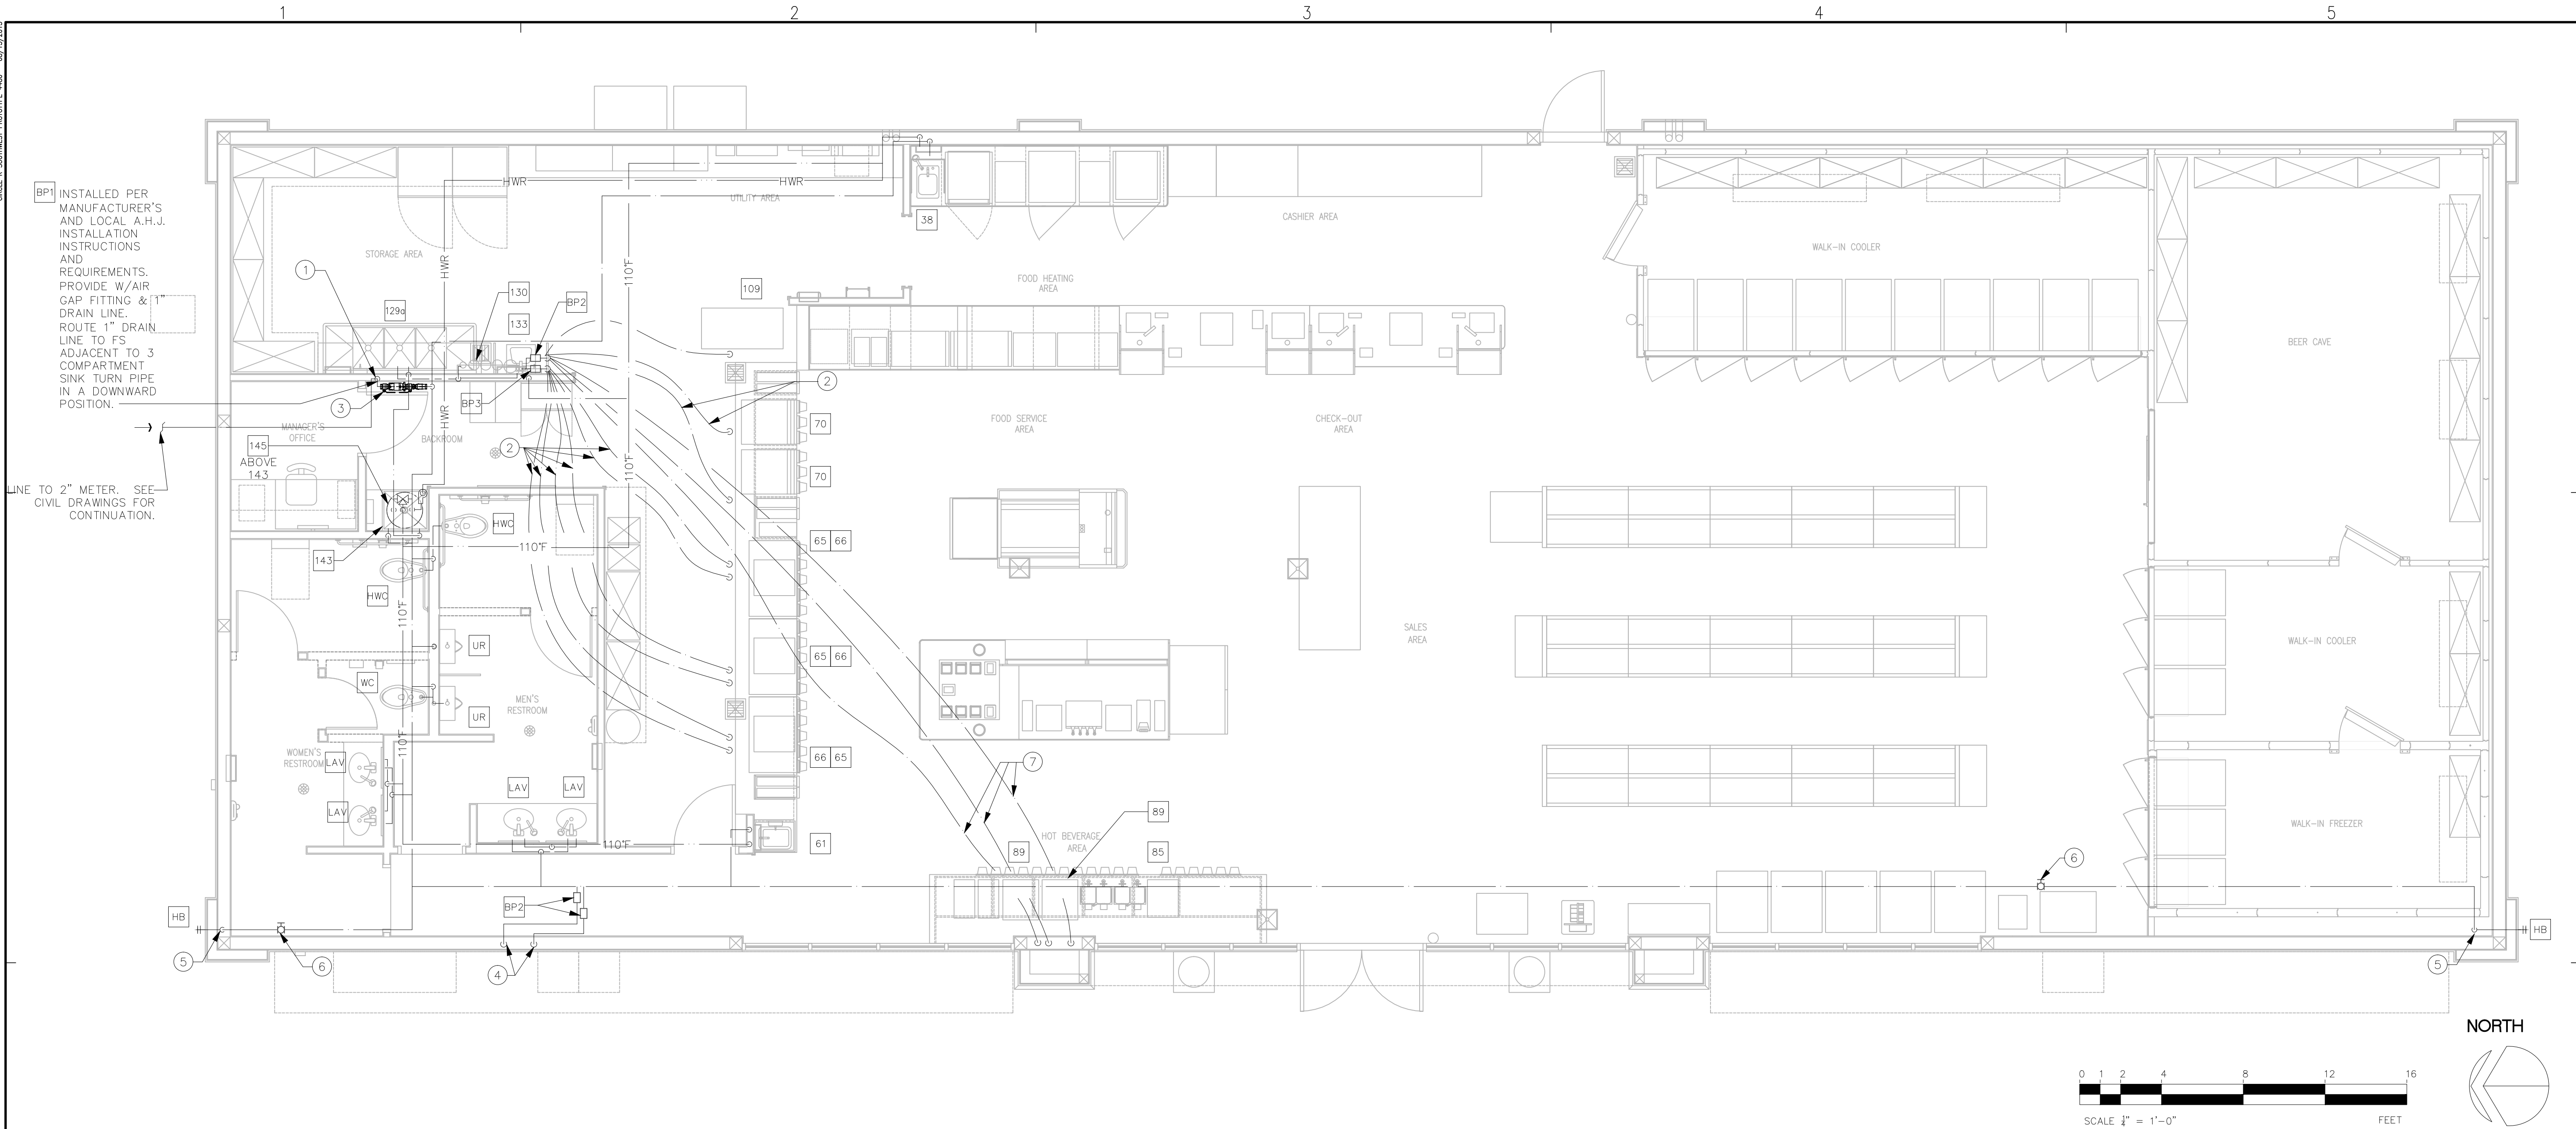

P1 HOT/COLD WATER + GAS FLOOR PLAN
1/4"=1'-0"

FOR BID ONLY

GENERAL NOTES	KEYED NOTES
<p>A. REFER TO HOT AND COLD WATER SCHEMATIC ON SHEET P.3.1 FOR HOT AND COLD WATER PIPE SIZING.</p> <p>B. PLUMBING CONTRACTOR TO PROVIDE BALL TYPE SHUT-OFF VALVES FOR ALL WATER LINES TO EQUIPMENT.</p>	<p>① MAIN WATER SUPPLY LINE UP IN WALL TO ABOVE CEILING. COORDINATE EXACT LOCATION.</p> <p>② FILTERED WATER ABOVE CEILING.</p> <p>③ SHUT-OFF (BALL VALVE) ABOVE CEILING. PROVIDE ACCESS (TYPICAL).</p> <p>④ 1/2" CW DOWN IN WALL AND TURN-OUT TO EXTERIOR. 1/2" CW TO STUB-OUT FOR FUTURE CONNECTION. RUN DRAIN LINE FROM WATER MACHINE THRU WALL TO HUB DRAIN, PROVIDE 2" AIR GAP. COLD WATER LINE SHALL BE PROVIDED WITH HEAT TAPE AND INSULATION.</p> <p>⑤ 3/4" CW LINE TO DROP DOWN IN BETWEEN COOLER WALL AND EXTERIOR WALL. COLD WATER LINE SHALL BE PROVIDED WITH HEAT TAPE AND INSULATION.</p> <p>⑥ SHUT-OFF VALVE FOR HOSE BIBB LOCATED IN CEILING SPACE. PROVIDE ACCESS AS REQUIRED.</p> <p>⑦ FILTERED WATER LINES ABOVE CEILING.</p>

GreenbergFarrow
1430 W. Peachtree St., Suite 200
Atlanta, GA 30309
t: 404 601 4000 f: 404 601 3980

COPYRIGHT NOTICE
This drawing is the property of the above referenced Professional and is not to be used for any purpose other than the specific project and site named herein, and cannot be reproduced in any manner without the express written permission from the Professional.

ISSUE/REVISION RECORD
DATE DESCRIPTION
02/13/15 PERMIT SET

PROFESSIONAL SEAL
ERIC MICHAEL WOLF
NEW MEXICO
22263
PLUMBING PROFESSIONAL
signed 02/12/15

PROFESSIONAL IN CHARGE
ERIC WOLF
PROJECT MANAGER
ALEX ADAIR
QUALITY CONTROL
ERIC WOLF
DRAWN BY
ALEX ADAIR

PROJECT NAME
CIRCLE K STORES, INC.

ALBUQUERQUE NEW MEXICO
4400 COORS BLVD. SW
ALBUQUERQUE, NM 87121

CIRCLE K STORES INC.

PROJECT NUMBER
20130791

SHEET TITLE
PLUMBING -
HOT/ COLD WATER
& GAS FLOOR PLAN

SHEET NUMBER
P2.1-CS