




DETAIL @ PURLIN BRIDGING
SCALE: NONE

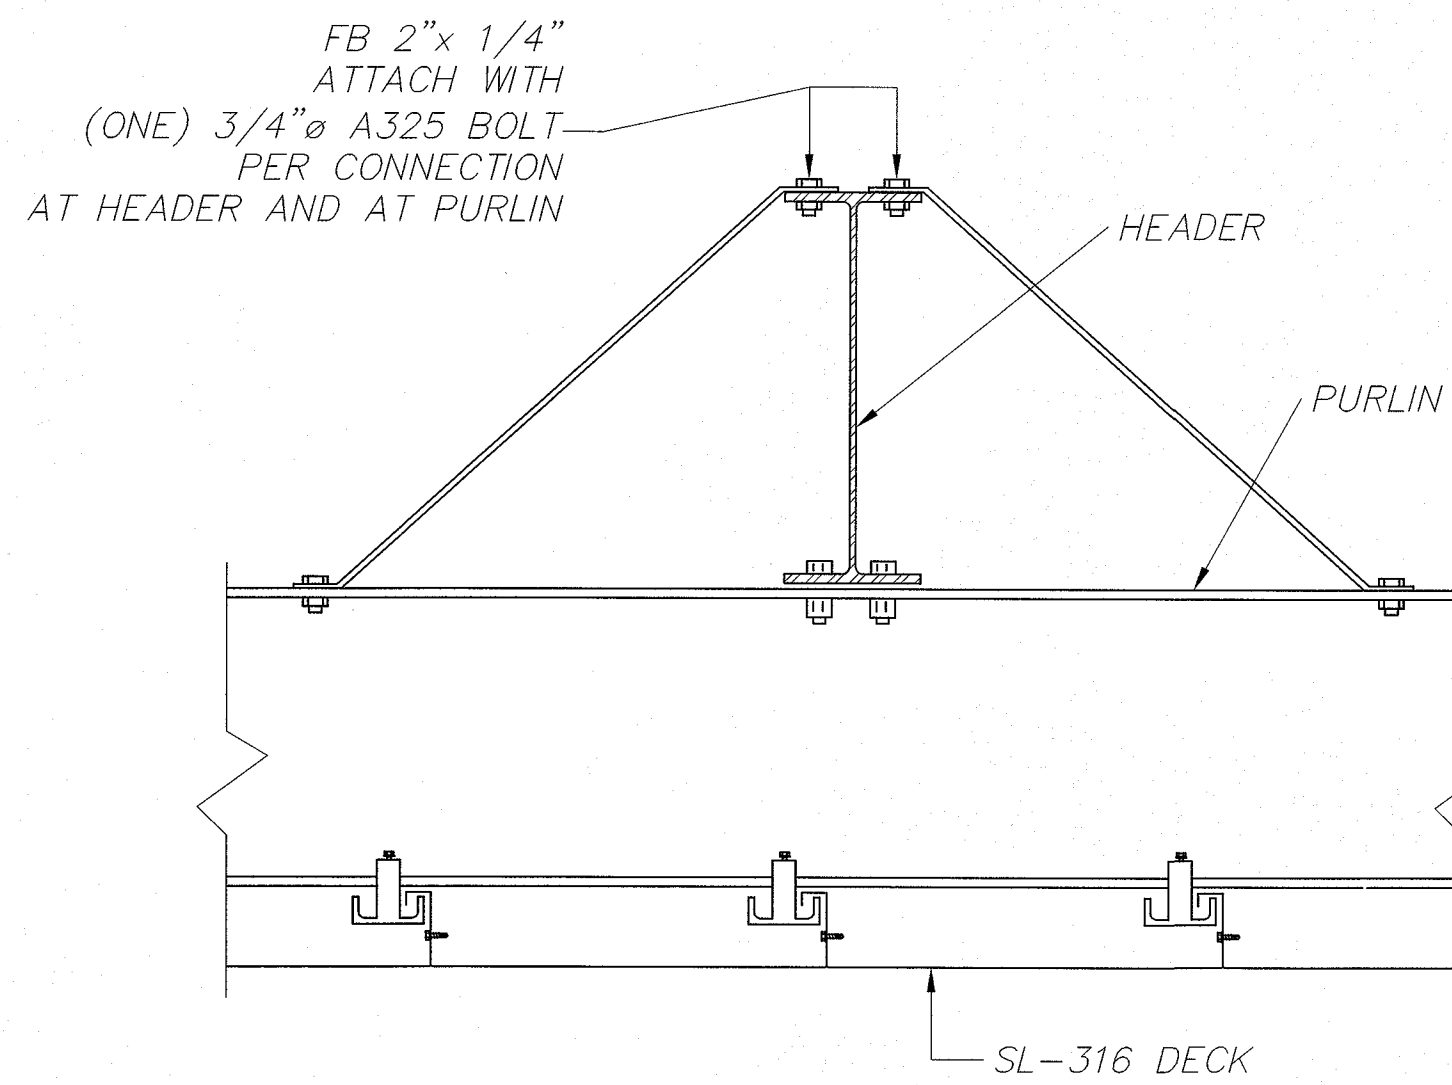


DETAIL @ HEADER BRIDGING
SCALE: NONE

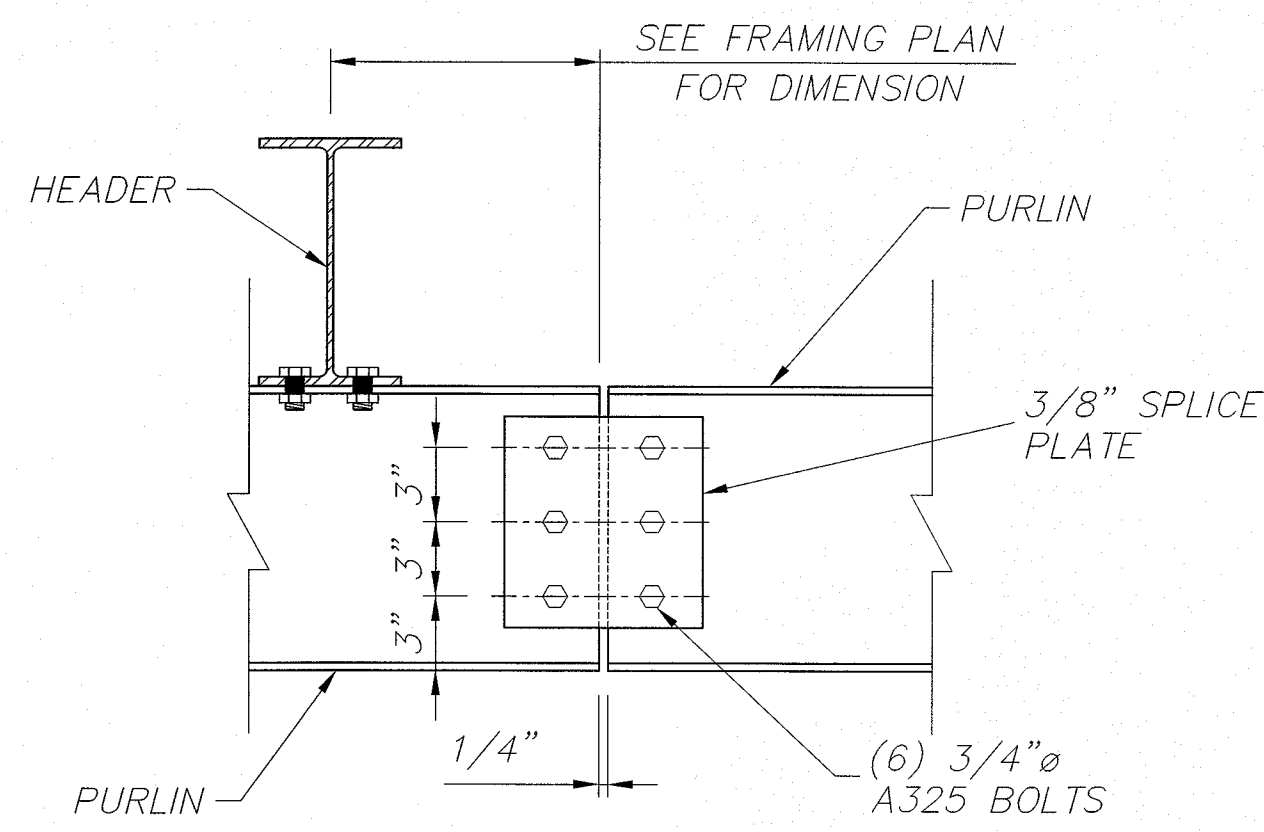


SECTION @ TYPICAL SHEAR SPLICE
SCALE: NONE

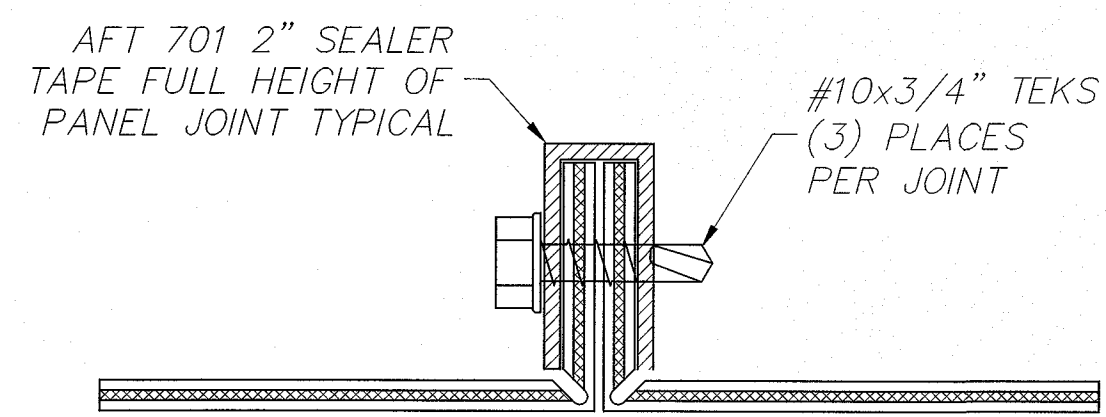


SECTION @ ACM FASCIA JOINT
SCALE: NONE

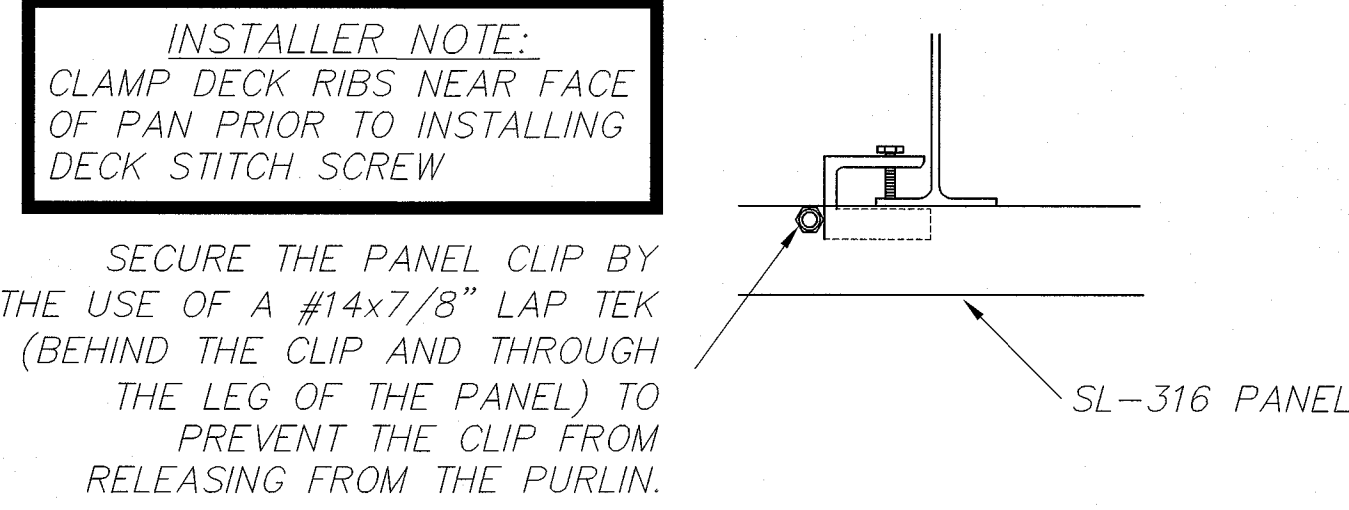


SECTION @ PANEL CLIP
SCALE: NONE

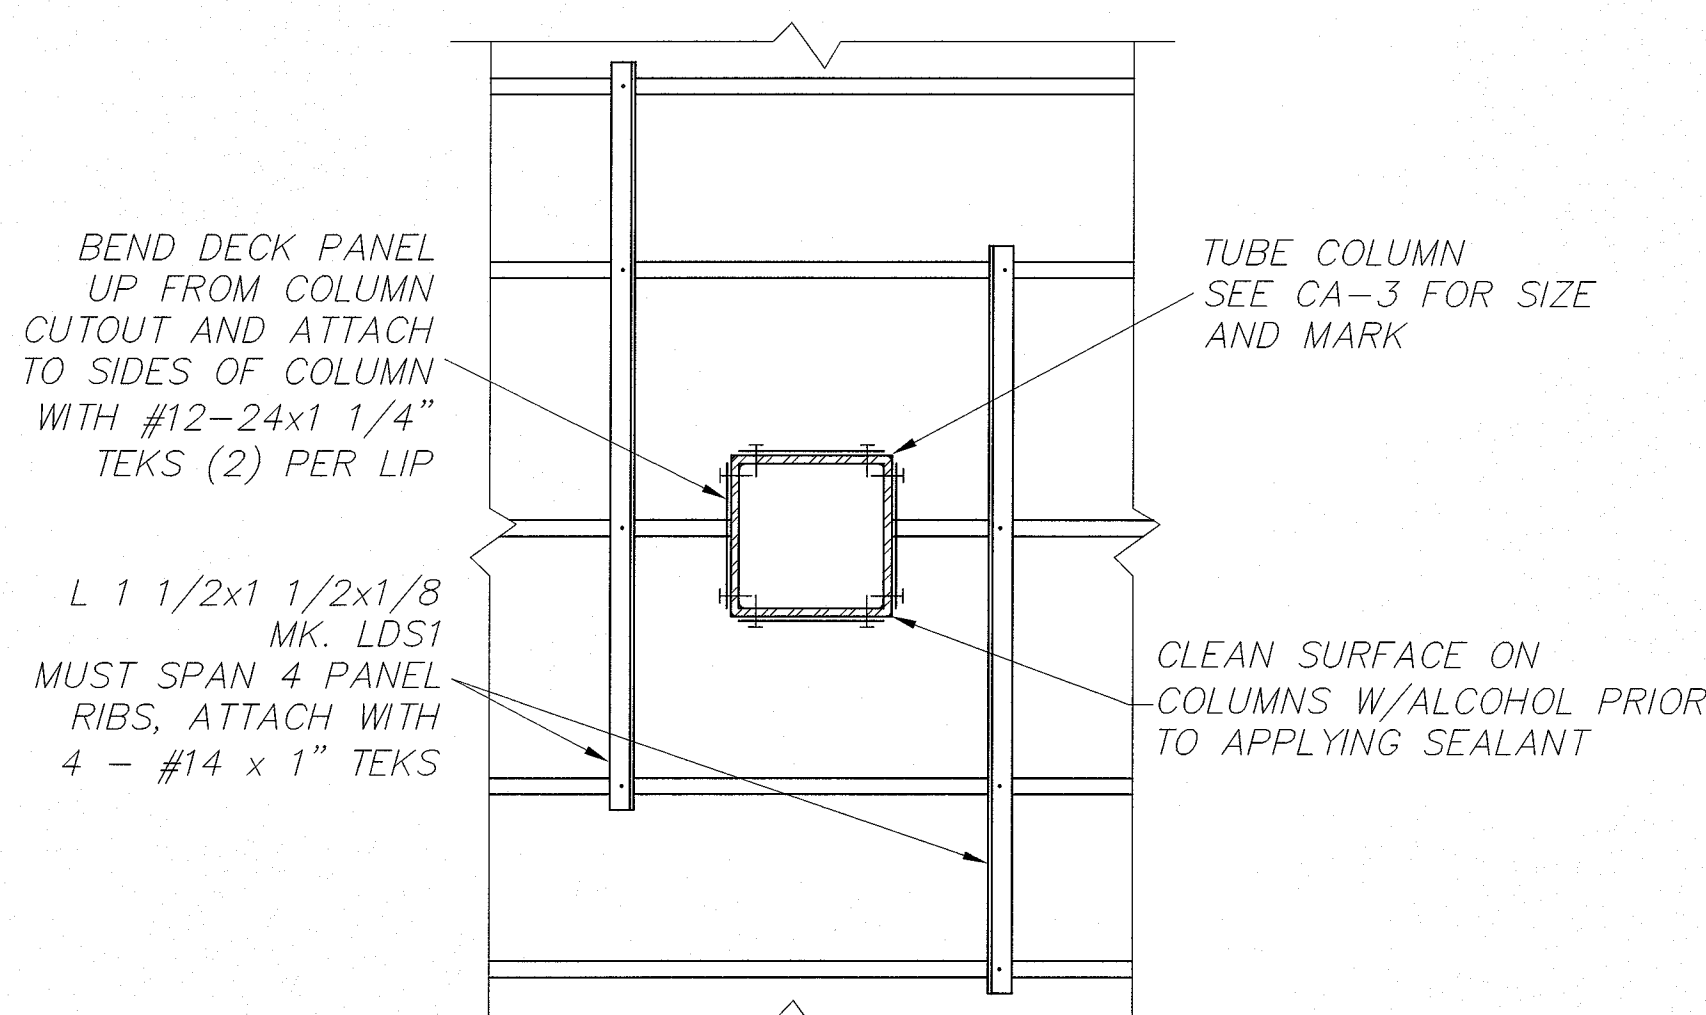


SECTION @ DECK SUPPORT
SCALE: NONE

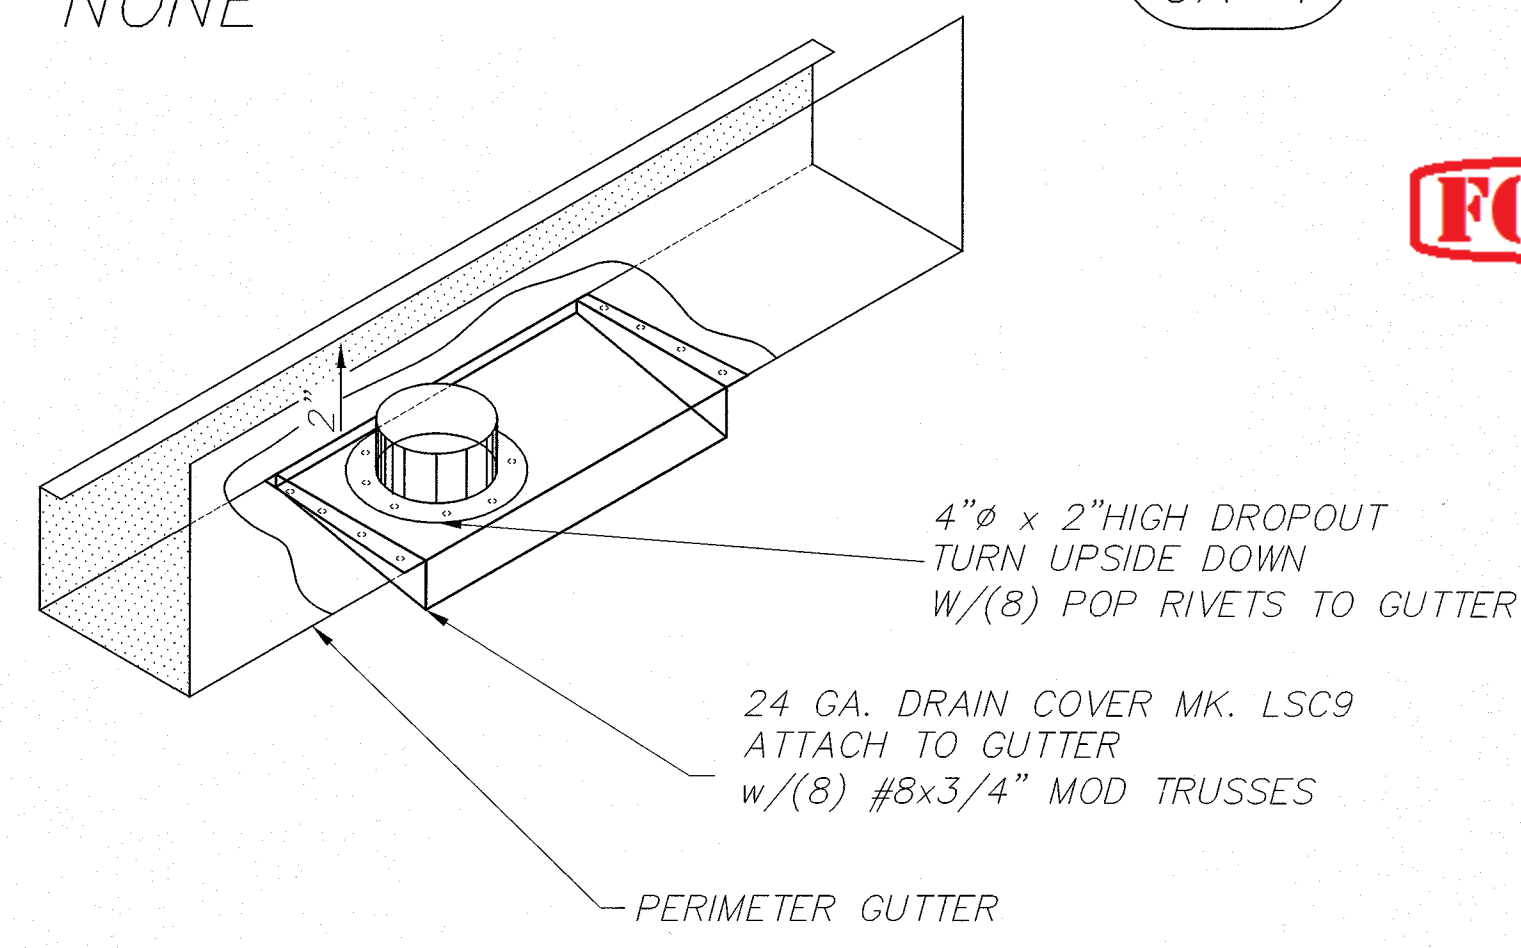


OVERFLOW DETAIL
SCALE: NONE

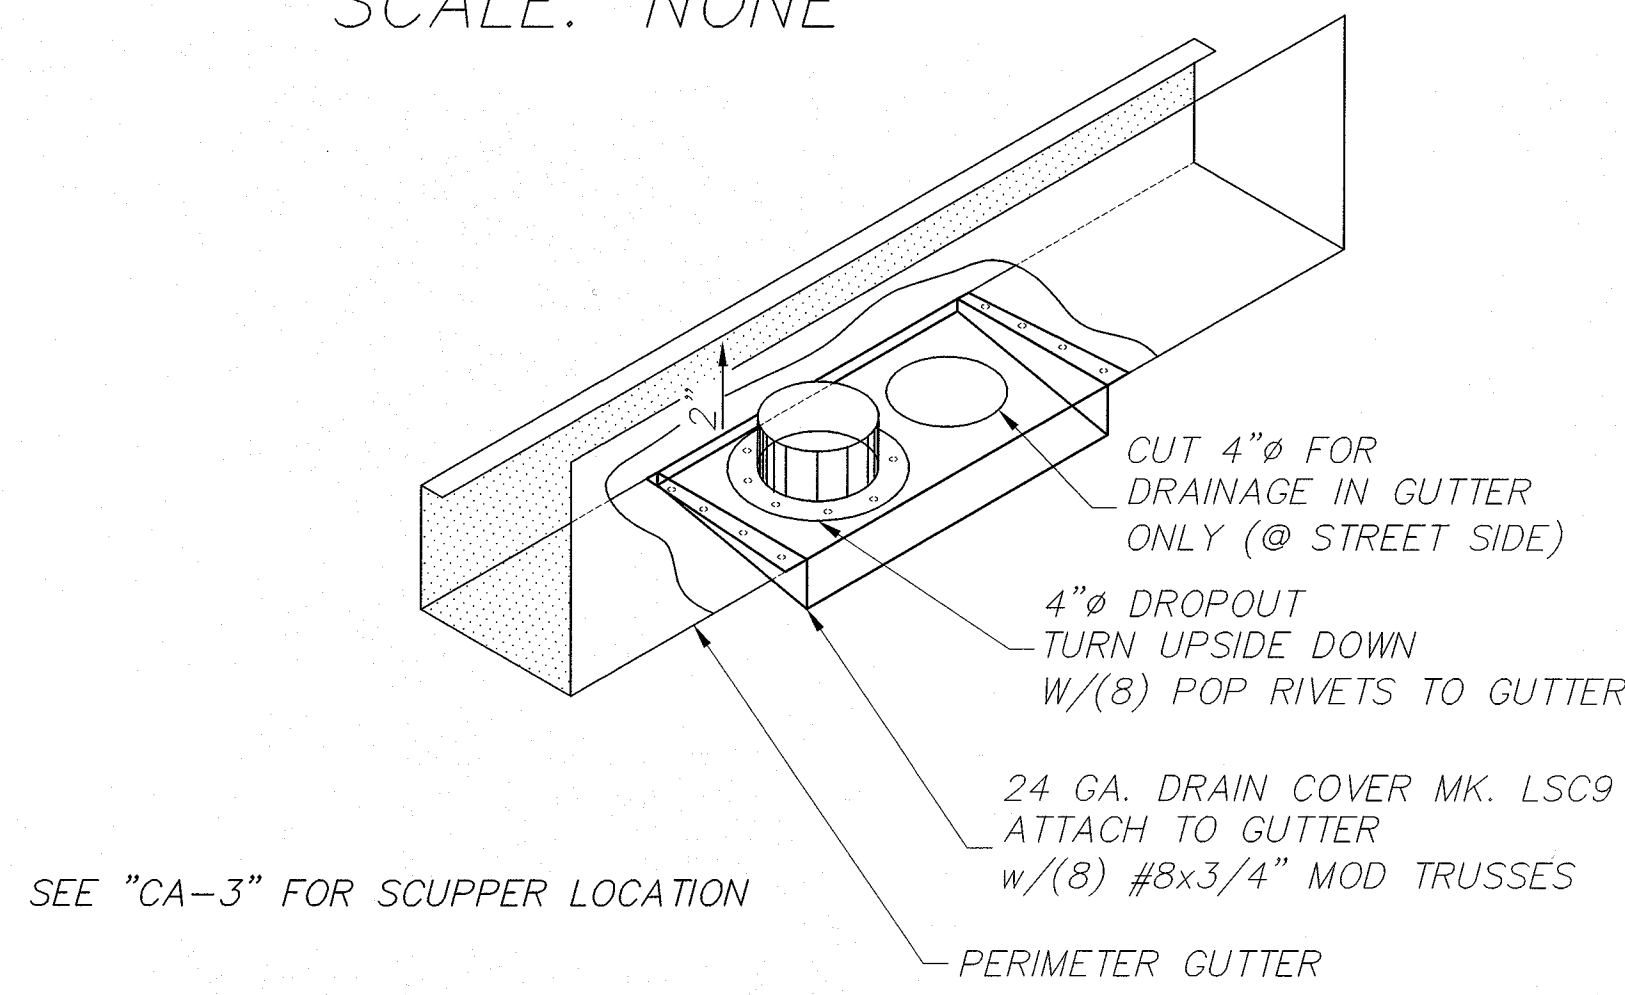

DRAINAGE DETAIL
SCALE: NONE

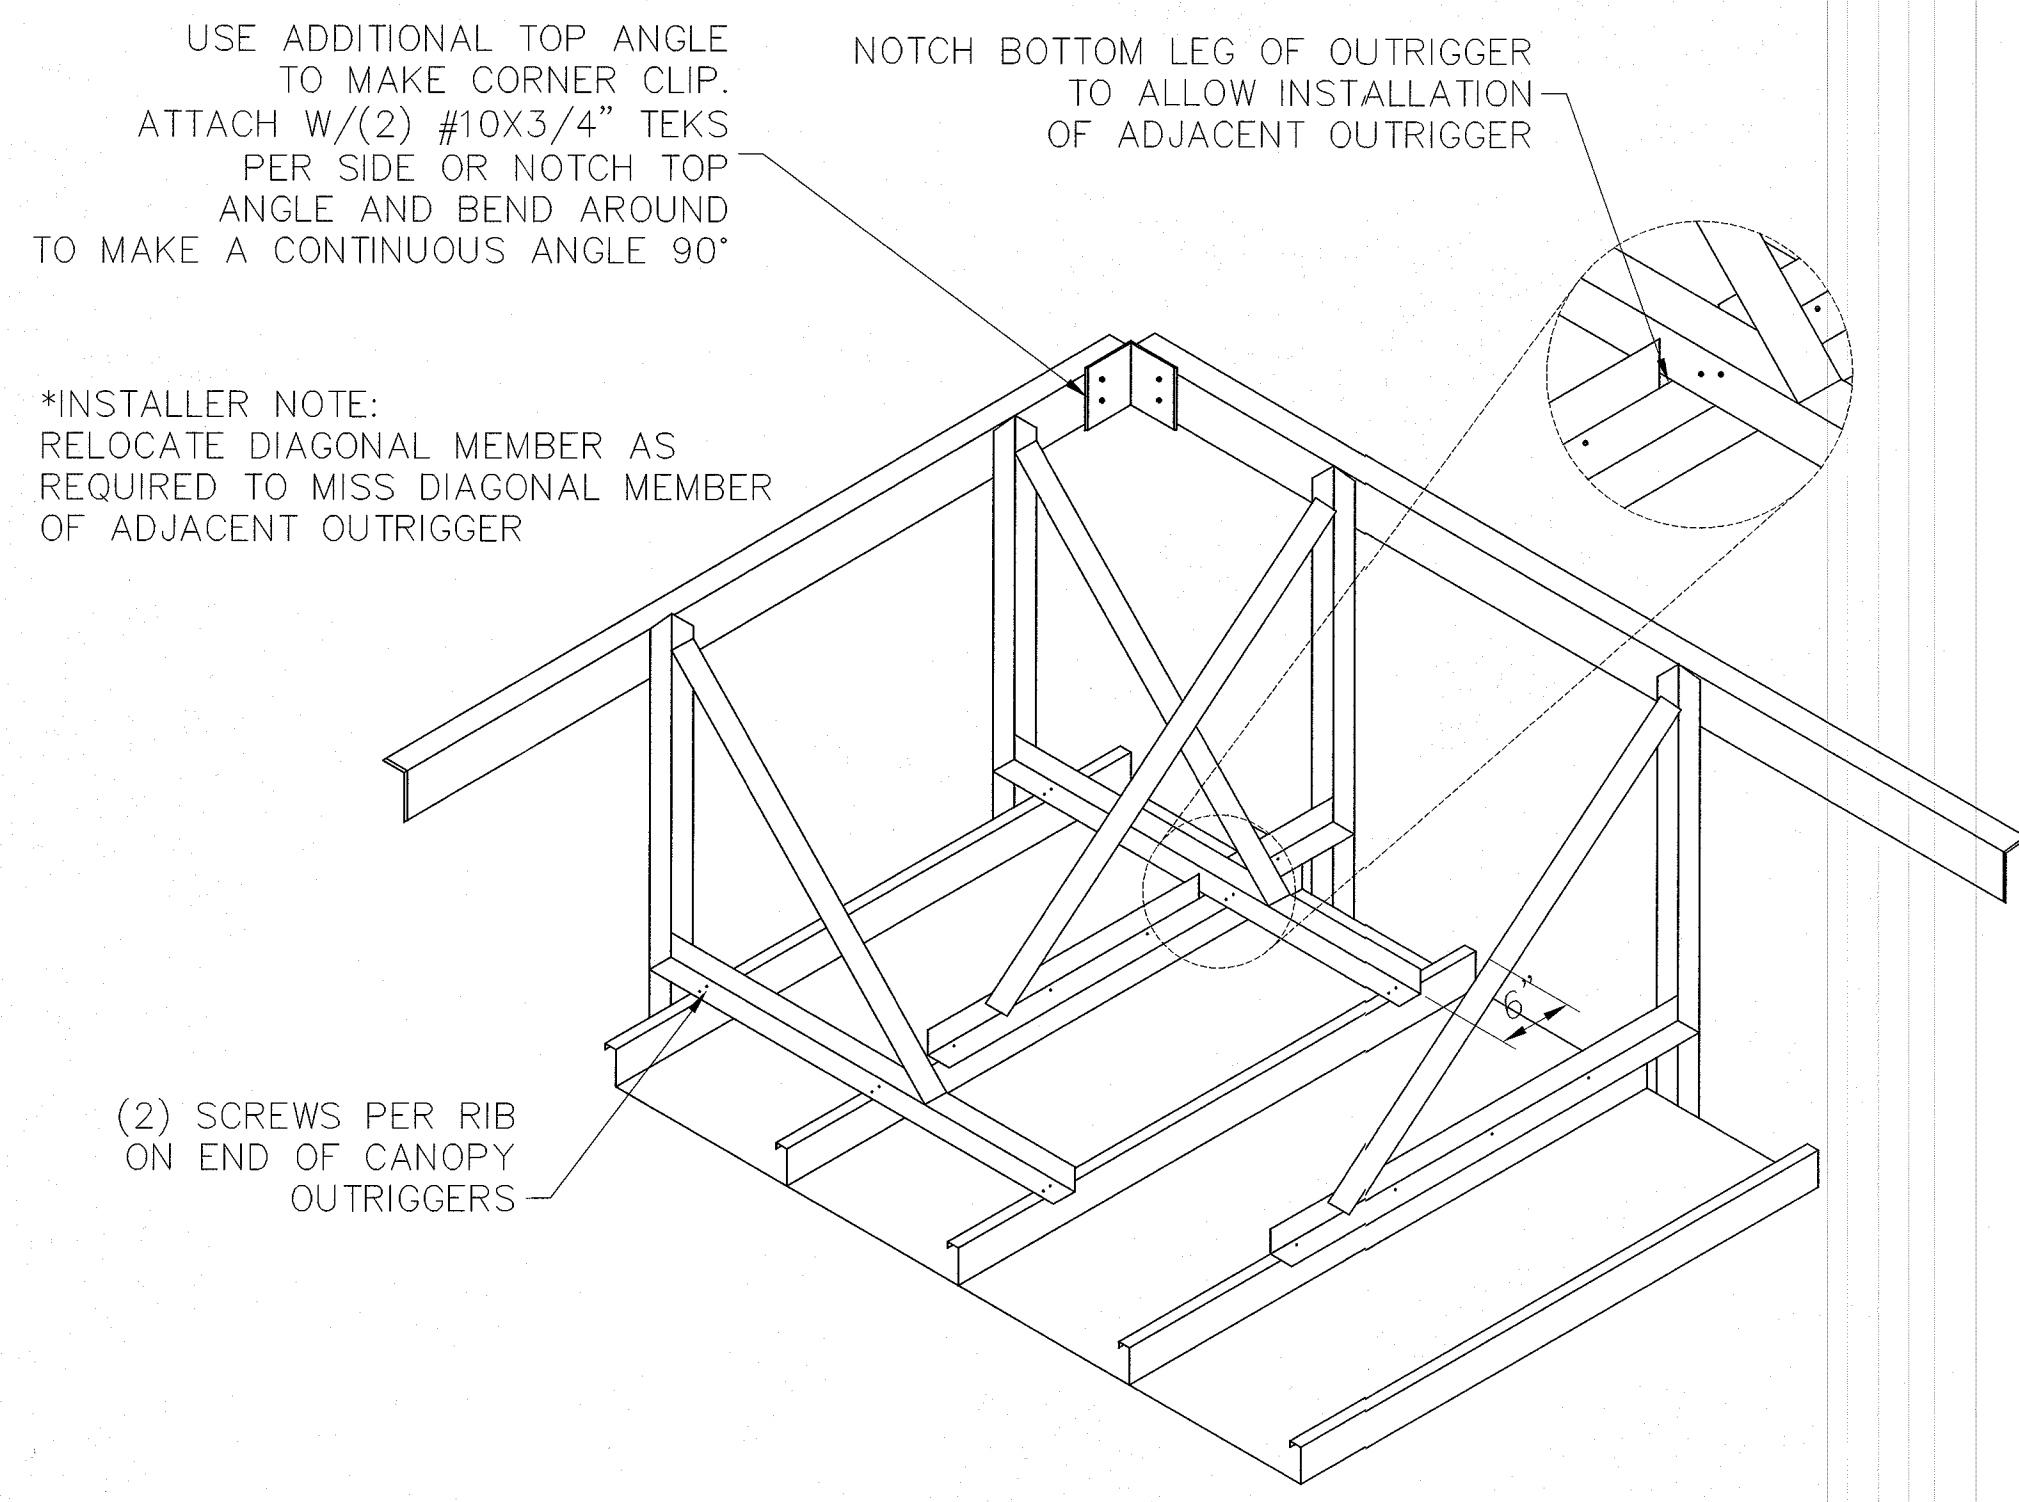

CORNER OUTRIGGER DETAIL
SCALE: NONE

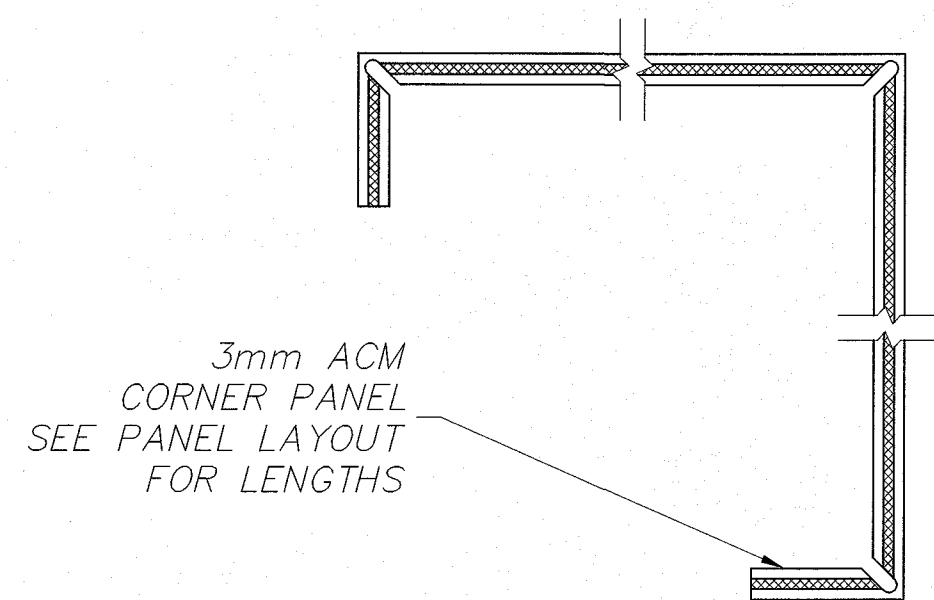

DETAIL AT CORNER
SCALE: NONE

DESIGN LOADS:
DEAD LOAD = 3 p.s.f.(DECK + LIGHTS) + WEIGHT OF STRUCTURAL COMPONENTS
LIVE LOAD = 20 p.s.f.
SNOW LOAD = 20 p.s.f.
WIND LOAD = 90 m.p.h. EXP. C
BLDG CODE = 2009 NEW MEXICO COMMERCIAL BUILDING CODE
EQUIVALENT LATERAL FORCE PROCEDURE
LATERAL FORCE RESISTING SYSTEM = CANTILEVERED COLUMN SYSTEM-ORDINARY STEEL MOMENT FRAME
SITE CLASS = D
Ss (0.2) = 0.57
S1 (1.0) = 0.17
SDS = 0.512
SD1 = 0.241
Fo = 1.34
Fv = 2.12
R = 1.25
IMPORTANCE FACTOR = 1.0
OCCUPANCY CATEGORY = II
SEISMIC DESIGN CATEGORY = D
CS = 0.410
CONSTRUCTION TYPE = IIB
OCCUPANCY CATEGORY = M
TOTAL SEISMIC BASE SHEAR BOTH DIRECTIONS = 15.24 KIPS

FOR BID ONLY

LANE
SUPPLY, INC.
120 FAIRVIEW
ARLINGTON, TX. 76010
(817) 261-9116

SEAL
ARCHITECT D. M. C. S. E.
NEW MEXICO
1984S
REGISTERED PROFESSIONAL SEAL
FER 1-2 2015

NO.	DATE	REVISIONS	CHK'D
0	2/13/2015	PERMIT SET	CP

LSC: 53703
DRAWN BY: CP
CHECKED BY:
DATE: 2/4/2015

CIRCLE K STORES INC.
CIRCLE K
S.E.C. COORS BLVD. S.W. & GUN CLUB RD. S.W.
ALBUQUERQUE, NM
42'-10" X 118'-2" CANOPY

CA-4.1