



Circle K Southwest Prototype 1480 - 09/13/2013
Drawing Name: P:\1013\20130780\000_Consultation_Document - Circle K Full Color Prototype A6.1-1_Col Building Elevations.dwg, Last Modified: Jan 20, 2015 - 10:55am by amato
Drawing Name: P:\1013\20130780\000_Consultation_Document - Circle K Full Color Prototype A6.1-1_Col Building Elevations.dwg, Last Modified: Jan 20, 2015 - 10:55am by amato

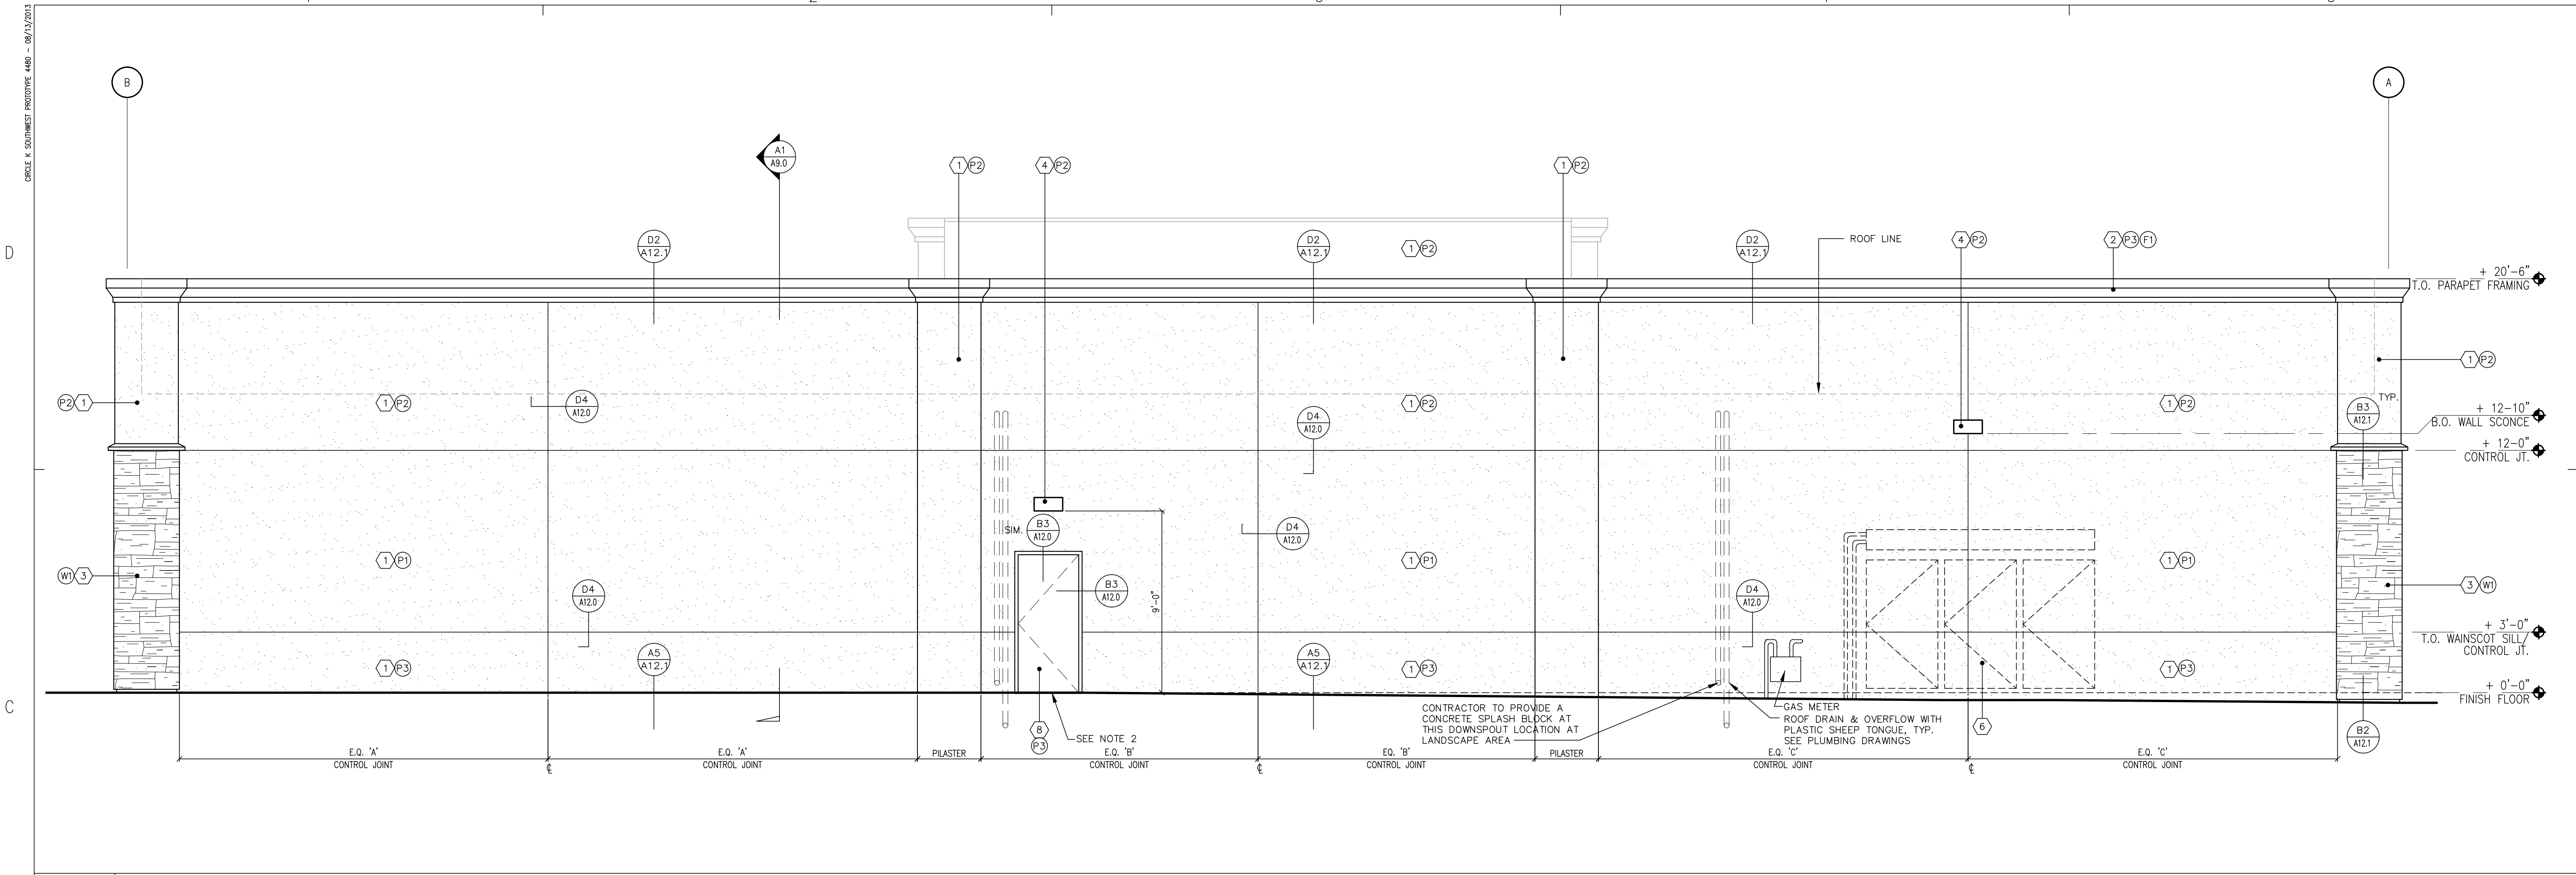

C1 REAR BUILDING ELEVATION (NORTH ELEVATION)
1/4"=1'-0"

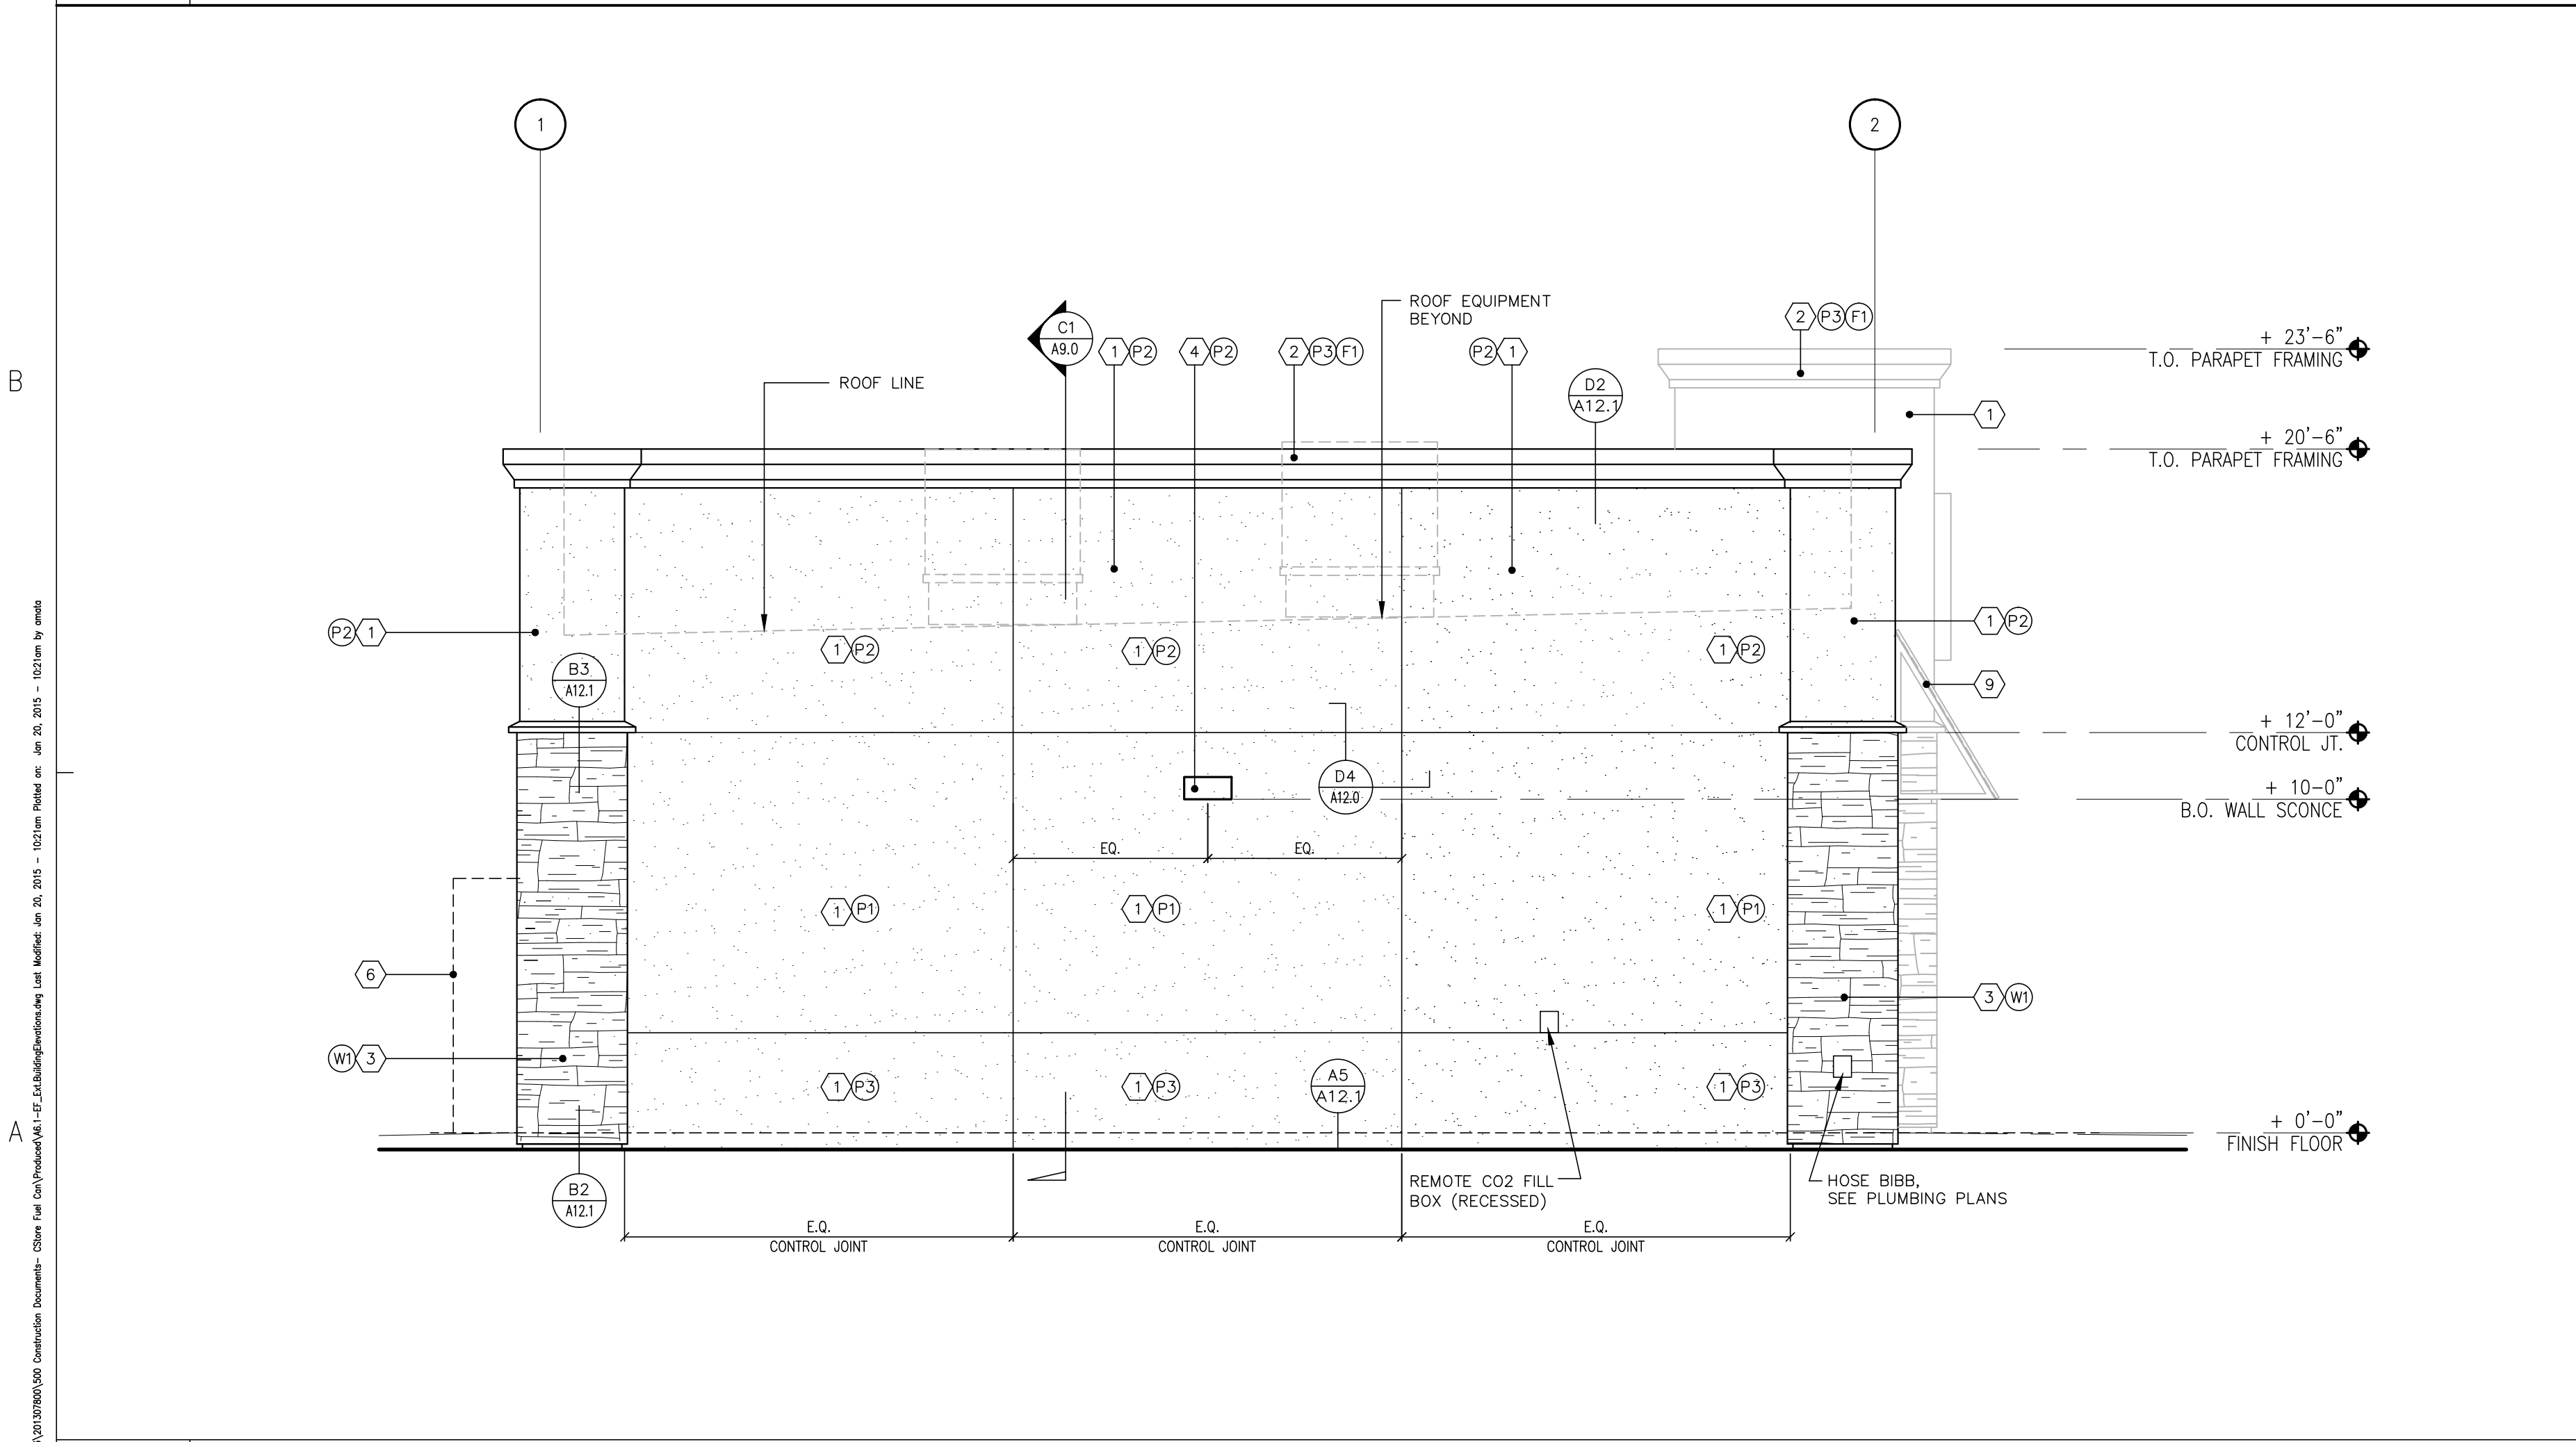

A1 LEFT SIDE BUILDING ELEVATION (WEST ELEVATION)
1/4"=1'-0"

MATERIAL CALL OUTS LEGEND		GENERAL NOTES:	
1	1-1/2" EIFS, MEDIUM SAND FLOAT TEXTURE FINISH.	1.	SEALANT: WHEN SEALANT IS REQUIRED ADJACENT TO LIGHT OR DARK AREAS, USE CLEAR SEALANT. ALL SEALANT SHALL BE PAINTABLE.
2	1-1/2" EIFS, MEDIUM SAND FLOAT TEXTURE FINISH OVER FOAM, AND METAL CAP FLASHING	2.	FINISH FLOOR 2" ABOVE FRONT WALK FOR MOISTURE PROTECTION OF SILL. ADJUST GRADES TO DOOR WITHIN ADA ACCESSIBILITY STANDARDS.
3	STONE VENEER	3.	CENTER SIGNAGE ABOVE FRONT DOOR, ADJUST HEIGHT PER ARCH.
4	COMPACT FLUORESCENT EXTERIOR WALL SCONCE, SEE ELECTRICAL LIGHTING PLAN	4.	ALL SIGNAGE TO BE APPROVED UNDER SEPARATE PERMIT.
5	ADDRESS SIGN NUMBERS MIN. 8" HIGH LETTERS & 1" STROKES ON CONTRASTING BACKGROUND	5.	SEE SHEET A11.0 FOR PAINTING AND FINISHING REQUIREMENTS.
6	S.E.S. PANEL LOCATION, SEE ELECT. DWGS.	6.	USE SHERWIN WILLIAMS A-100 EXTERIOR ACRYLIC LATEX PAINT FOR EXTERIOR PAINT AND STUCCO FINISH.
7	EMERGENCY SHUT OFF SWITCH MOUNTED AT 40" A.F.F.	7.	USE SHERWIN WILLIAMS DTM ACRYLIC COATING FOR ALL METAL PAINT FINISH.
8	DOOR AND FRAME, PAINTED METAL. COLOR: MATCH ADJACENT SURFACE.		
9	STANDING SEAM METAL ROOFING (COLOR: "BERRIDGE CHAMPAGNE") ON TUBE STEEL FRAMING AWNING, PROVIDED BY CONTRACTOR		
T	TEMPERED GLAZING PANELS		
COLOR SCHEDULE			
P1	SHERWIN WILLIAMS - SW7683 "BUFF".	FOR BID ONLY	
P2	SHERWIN WILLIAMS - SW6115 "TOTALLY TAN".		
P3	SHERWIN WILLIAMS - SW6095 "TOASTY"		
W1	ENVIRONMENTAL STONWORKS - "WEATHERED EDGE SERIES" CHARDONNAY OR EQUAL.		
F1	CAP FLASHING: FIRESTONE UNA-CLAD; COLOR: "COLONIAL RED"		
STOREFRONT: CLEAR ANODIZED ALUMINUM.			

0 1 2 4 8 12 16
SCALE 1/4" = 1'-0" FEET

GreenbergFarrow

1430 W. Peachtree St., Suite 200
Atlanta, GA 30309
t: 404 601 4000 f: 404 601 3980

COPYRIGHT NOTICE
This drawing is the property of the above referenced Professional and is not to be used for any purpose other than the specific project and site named herein, and cannot be reproduced in any manner without the express written permission from the Professional.

ISSUE/REVISION RECORD
DATE DESCRIPTION
01/19/15 PERMIT SET

PROFESSIONAL SEAL

PROFESSIONAL IN CHARGE
HUGHES THOMPSON
PROJECT MANAGER
OSCAR FLORES
QUALITY CONTROL
WARREN DRURY
DRAWN BY
ARMANDO MATA

PROJECT NAME
CIRCLE K STORES, INC.

COLORADO SPRINGS COLORADO

E. FOUNTAIN BLVD & ACADEMY PARK LOOP

CIRCLE K STORES INC.

PROJECT NUMBER
20130780

SHEET TITLE

EXTERIOR BUILDING ELEVATIONS

SHEET NUMBER
A6.1-CS