


CIRCLE K SUBMIT PROTOTYPE 4480 - 09/12/2013	1	2	3	4	5
	GENERAL FINISH PLAN NOTES				
	INSTALLATION NOTES:			CLEANING NOTES:	
	INSTALL TILE PER MANUFACTURERS RECOMMENDATIONS. TILE TO BE SET ON DIMENSIONALLY STABLE CONCRETE SUBFLOOR TO CONFORM TO ANSI A108.5 WITH ACRYLIC MODIFIED DRY SET MORTAR. ALL DRY SET MORTAR IS TO BE MIXED WITH ACRYLIC ADMIX IN LIEU OF WATER.			CLEAN TILE SURFACES AS THOROUGHLY AS POSSIBLE ON COMPLETION OF GROUTING AND REMOVE ALL GROUT HAZE. ACID BASE CLEANERS SPECIFICALLY PROHIBITED. RISE THOROUGHLY WITH CLEAN WATER BEFORE AND AFTER USING AQUA MIX HEAVY DUTY TILE AND GROUT CLEANER. POLISH WITH SOFT CLOTH.	
	FLOOR TILE GROUTING IS TO CONFORM WITH ANSI A108. FOR GROUTING OF FLOOR TILE WITH ACRYLIC MODIFIED PORTLAND CEMENT GROUT. ALL GROUT IS TO BE MIXED WITH LIQUID WHICH CONSISTS OF ONE PART CLEAN WATER AND ONE PART ACRYLIC MORTAR ADMIX AS RECOMMENDED BY MANUFACTURER.			GROUT	
	ALIGN SAW-CUT CONTROL JOINTS W/ TILE LAYOUT.			PROVIDE BLACK "EPOXY" GROUT AT THE SALES AREA MIN. 1/8" SPACING.	
				1. GENERAL CONTRACTOR TO INSTALL ALL CERAMIC TILE PRIOR TO INSTALLATION OF CABINETRY OR COOLER BOX.	

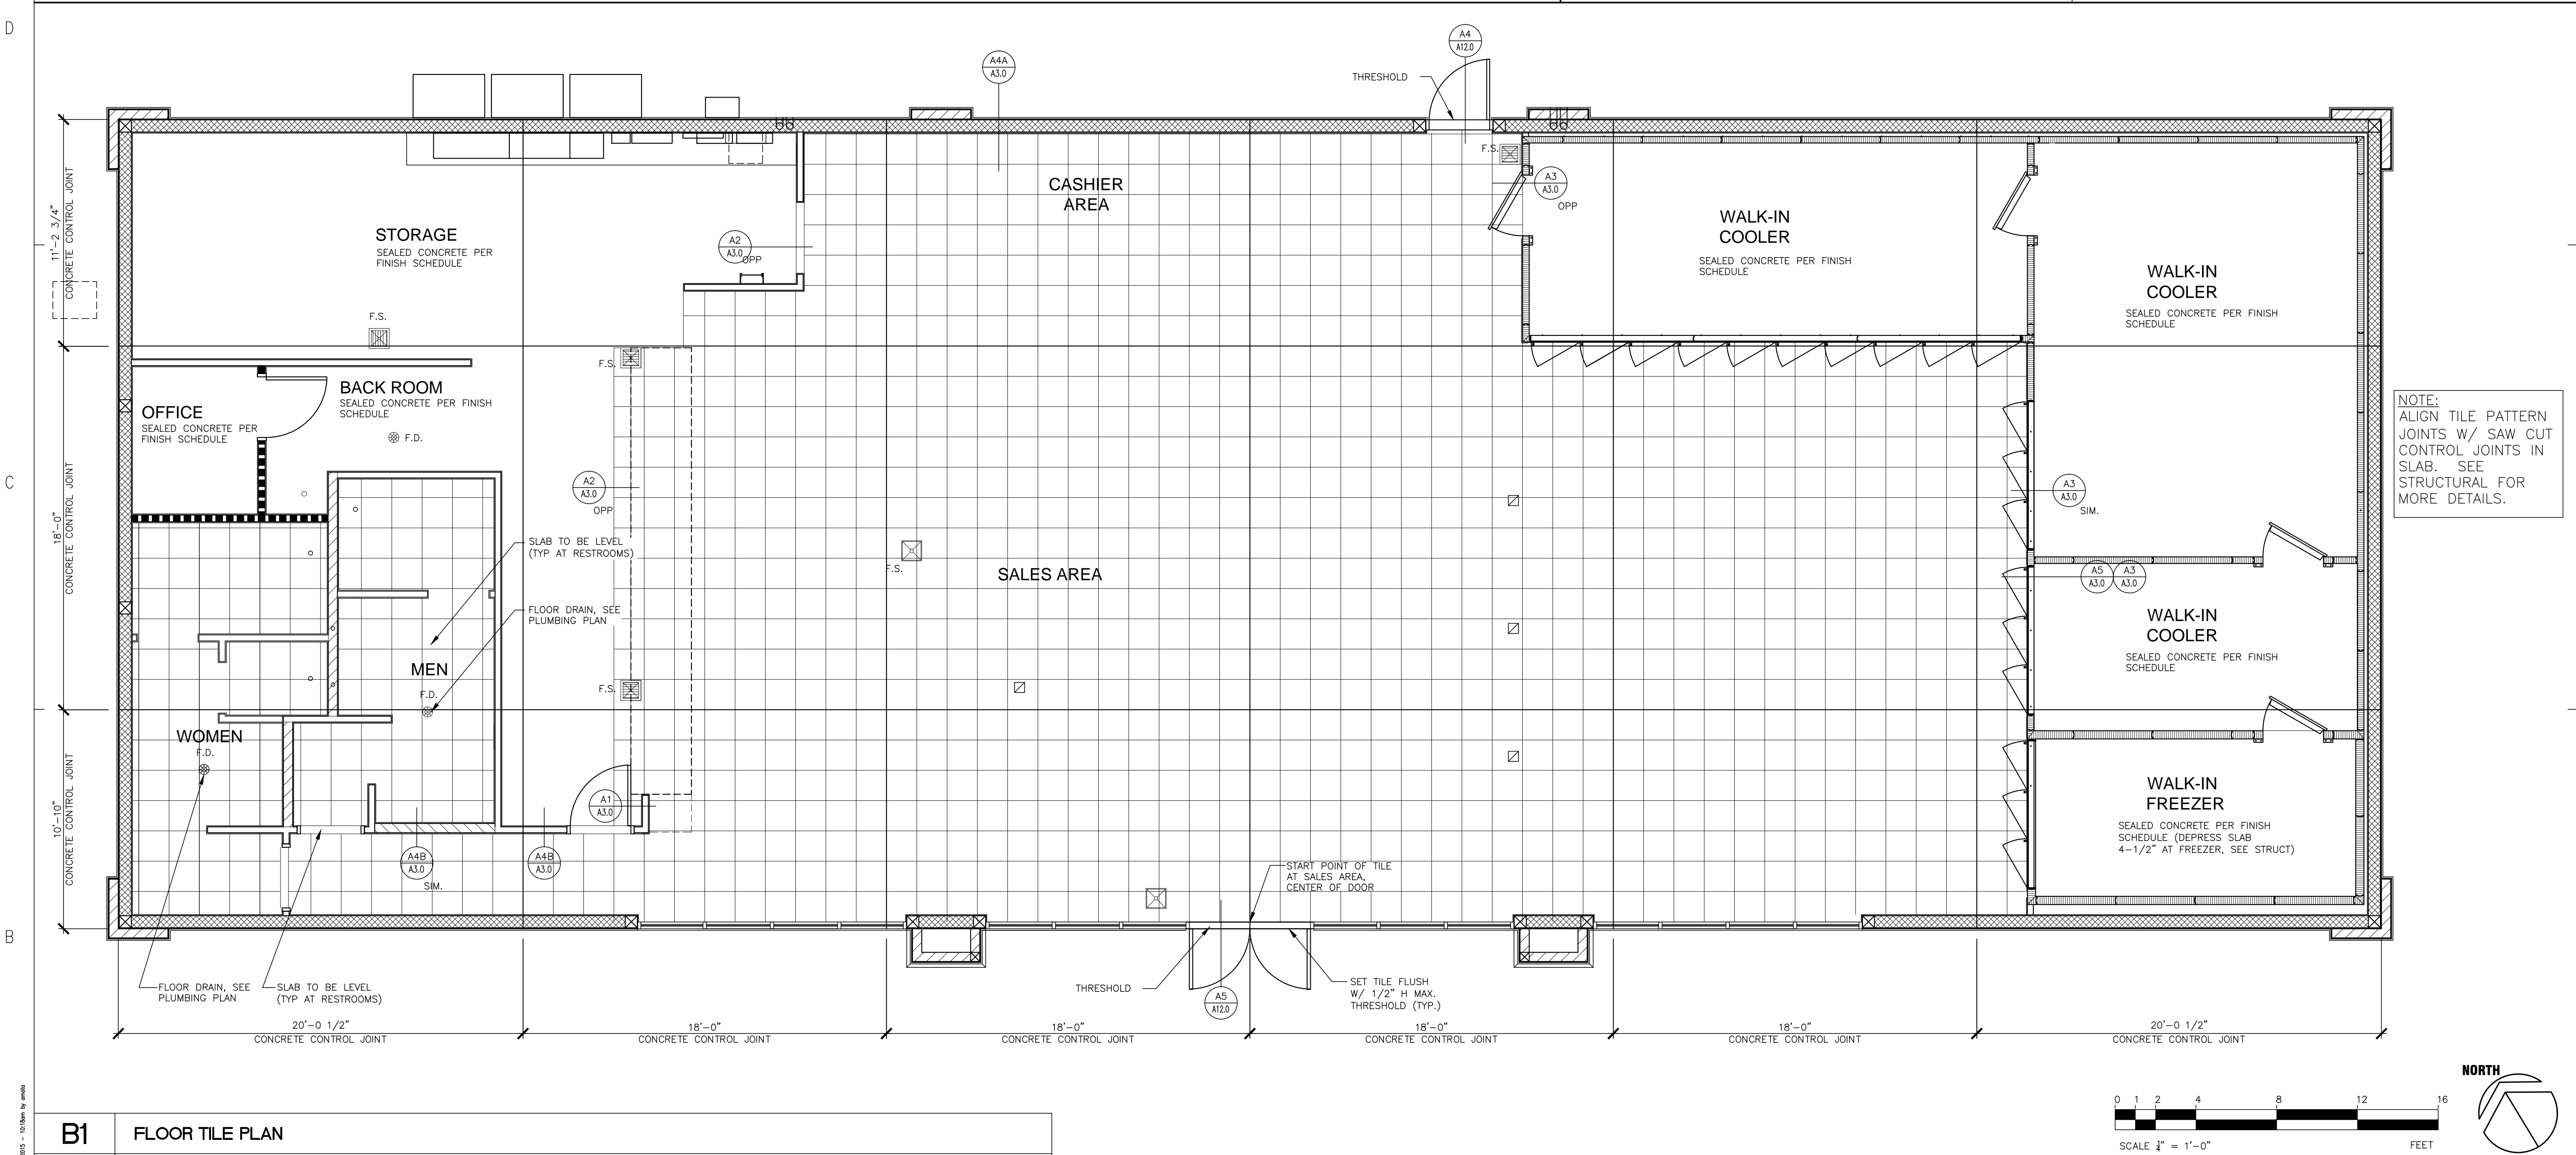

1/4"=1'-0"

</